

# Axcess™ 2000.H

Heated, Self-Serve Order Pick-Up Station

Two-sided design for fast order loading and pick-up

## Cabinet

Stainless steel inner and outer body

Holding temperature:  
130° F/54° C to 170° F/77° C

Convection heat

Insulated for temperature stability and energy efficiency

Illuminated compartments for better visibility

Smooth interior covered corners for easier cleaning

LED indicator lights on either side of back doors to aid in compartment loading

Power cord cable management hooks on the back electrical panel

## Front Doors

Seven electronically controlled compartment doors open and close automatically

Break beam safety feature on either side of doors to prevent closure during customer interaction with the compartments

Each compartment door has a tempered glass window

Side lights indicate compartment opening

## Wire Rack Insert

Seven stainless steel wire rack inserts

Racks are easily removable for cleaning



## Customer Visual Display (CVD)

18" display located at the top front side of the unit


Displays compartment numbers and the names of customers whose orders are currently in the station



## Customer User Interface (CUI)

7" touchscreen and QR code reader provide accessible accommodation

Customers can either scan their pick-up code or enter the numeric code using the onscreen keypad to collect their order from the station

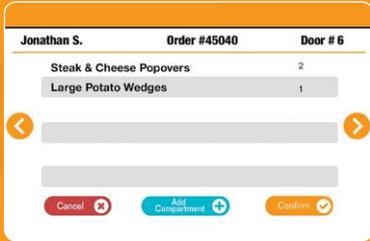

**Employee User Interface**

7" touchscreen located on the back of the unit  
Barcode reader mounted below the touchscreen  
Touchscreen and reader provide accessible accomodation



**Back Doors**

Two doors – upper door provides access to compartments (1-3) and lower door provides access to compartments (4-7)

Each door has an 18" stainless steel pull handle, self-closing hinges and tempered glass

NSF approved door gaskets

Pull handles (2) on each side of the unit

**Base**

Aluminum construction

Casters: 3.5" radius swivel, thermoplastic rubber (TPR) wheels, 1.25" wide, load capacity 250 lbs. each

Rear casters equipped with brakes

Removable caster trim cover on front

**Power Unit**

Top mounted

Heater: 1700 Watts

Thermostat: Electronic temperature control with digital display on back user interface

Heater Control Switch: On/Off rocker type switch

Power Cord: Permanent ~10 foot, twistlock plug (NEMA L5-20P)



Dimensions: Width: 23.5" | Depth: 35.5" | Height: 79"  
Shipping Dimensions: Width: 44" | Depth: 43" | Height: 86"  
Compartment Interiors: 16" x 5.4" x 22" | Compartment Capacity: 20 lbs.  
Weight: 500 lbs. | Shipping Weight: 615 lbs.  
Electrical: 120 VAC/60 Hz/16 A (single phase)



For indoor use only in operating temperatures between 55° F/13° C and 100° F /38° C. Certified to UL 197, NSF 4, CSA C22.2 No. 109, FCC Part 15

**Easy to Use. Easy to Implement. Easy to Afford.**

For more information about the AXCESS 2000.H Self-Serve Pick-Up Station, visit ApexSupplyChain.com, email us at info@apexsupplychain.com or call 800.229.7912 to visit our Customer Experience Center.

Apex Supply Chain Technologies | 4393 Digital Way | Mason, OH 45040 | USA

Imagine the Possibilities™

